


2MP IP BULLET CAMERA

YUC-H7B26A

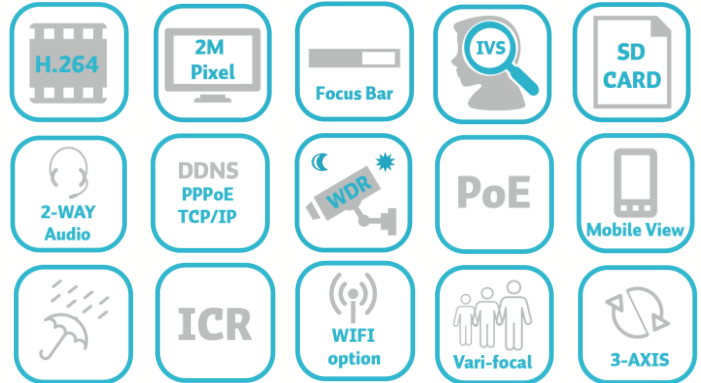

Feature


- H.264 2MP/1080P 30fps IP Camera
- Anti-fog / Corridor mode / Distortion correction smart function
- Tampering detection & 3 motion area setup
- Built-in varifocal lens 3-10.5mm
- ESD & surge protection design
- Support SD card continuous recording up to 64G
- Day/night profile and smart IR
- Analogue output
- 3-Axis bracket included
- Weather proof IP66
- Mobile view support (push video)
- POE support
- ONVIF compliant



Distortion Correction



Corridor Mode

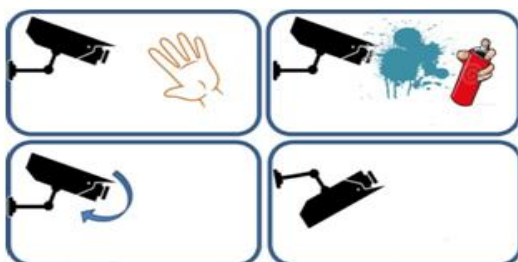

Tampering Detection



IR Optimizer

Specification

YUC-H7B26A

Server	Compression	H.264 / MJPEG
	Resolution	1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps)1920x1080
	Safety	User-ID and password
	Protocols	Ipv4/v6 / HTTP / HTTPS / QoS Layer 3 level / FTP / SMTP / Bonjour / UPnP / SNMPv1/v2c/v3 / DNS / DDNS / NTP / RTSP / RTP / UDP / IEEE 802.1x / DHCP / Access list filtering
	Number of User	Max. 10 connections
	Storage Capacity	Micro SD / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection / I/O / Schedule / Tampering detection
Network Camera	Sensor	1/2.7" Megapixel CMOS sensor
	Optical Lens	3 -10.5mm / F1.4
	View Angle	34.56° ~ 103.73°(H) , 17.23° ~ 54.43°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.05 Lux(Color) / 0.01 Lux(B/W)
	IR LED / Range	35pcs / 30M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	Anti-fog / Focus bar / Distortion Correction / Tampering Detection / IR Optimizer / D-WDR / Motion Detection / Privacy Mask / 3D-De Noise Reduction
	Audio	Audio
Audio Compression		G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
Adjust Volume		Mic-in / Line-out web adjustable
Audio In		3.5mm phone jack(Support 2-way)
Audio Out		3.5mm phone jack(Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE / WiFi(802.11/b/g/n)
	Video Interface	BNC , Video composit(NTSC/PAL)
	External Port	DI / DO
	SD Card	Micro SD(Up to 64GB)
General	Operation Voltage	DC 12V Max: 4.80W(IR on) / 2.76W(IR off) PoE Max: 6.72W(IR on) / 3.84W(IR off)
	Dimen./Weight	77.4mm(φ) x 125.5mm(H) / 720g
	Operation Temp.	-20°C ~ +50°C
	Waterproof	IP66

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Design Features




External zoom / Focus adjustment



External SD card slot with cover
(Add rubber for waterproof)

Dimension

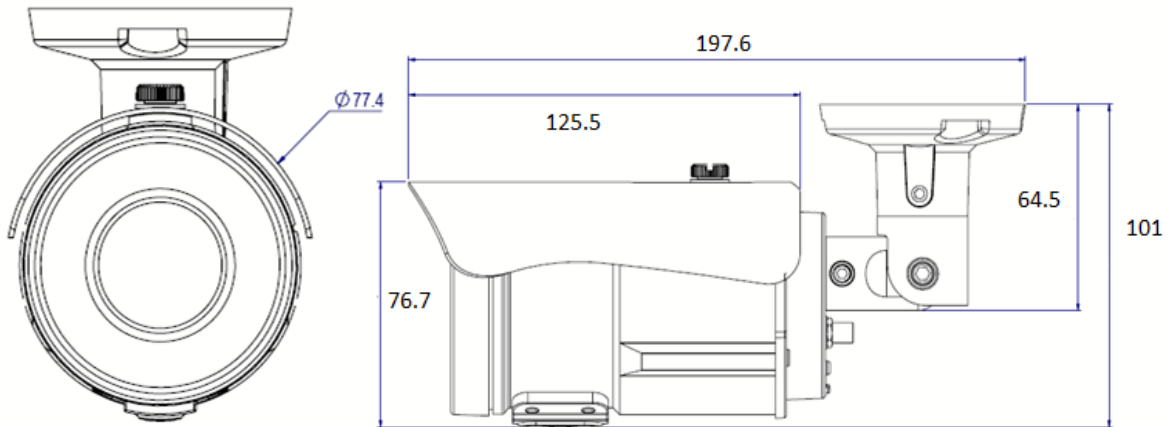

Accessories



YUK-D06
Junction Box (option)