

# 4MP AUTO FOCUS IP BULLET CAMERA

## YUC-H7B82M



### Feature

- H.264 4MP (2688x1520) 30fps real time
- Privacy mask for 3 areas
- Tampering detection & 3 motion area setup
- Built-in 4.2X motorized zoom lens 2.8-12mm
- Support SD card continuous recording up to 64G
- Day/night profile adjustment
- Analogue output
- 3-Axis bracket included
- Weather proof IP66
- Heater built-in option
- Mobile view support (push video)
- POE support
- ONVIF compliant

### Low Bandwidth



Save Until 20% of HDD Space



3-step IR Intensity



Privacy Mask

# Specification

## YUC-H7B82M

Server	Compression	H.264/JPEG
	Resolution	2688x1520@30fps, 1920x1080@30fps,1280x720@30fps, 640x360@30fps
	Traffic Control	32K ~ 10Mbps
	Max. Frame Rate	(30fps)2688x1520
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based, authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list,IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE,DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
	Number of User	Max. 10 connections
	Storage Capacity	Micro SD card / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection/ I/O / Schedule / Tampering Detection
Network Camera	Sensor	1/3" Megapixel CMOS sensor
	Optical Lens	Motorized lens 2.8~12mm/ optical 4.2X zoom in
	View Angle	35.76~90.47°(H), 24.76~49.55°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor/ 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.08 Lux (Color), 0.03 Lux (B/W)
	IR LED / Range	28pcs + 2 pcs high power / 30M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Motion Detection / Privacy Mask / Noise Reduction/Tampering Detection/ IR Intensity
	Audio	Audio
Audio Compression		G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
Adjust Volume		Mic-in / Line-out web adjustable
Audio In		3.5mm phone jack(Support 2-way)
Audio Out		3.5mm phone jack(Support 2-way)
Terminal	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE / WiFi (802.11/b/g/n)
	Video Interface	--
	External Port	DI / DO
	SD Card	Micro SD Card(Up to 64GB)
General	Operation Voltage	DC 12V Max: 6.6W(IR ON); 3.48W(IR OFF) PoE Max: 8.64W(IR ON); 4.8W(IR OFF)
	Dimen./Weight	77.4mm (Æ) x 125.5mm (H) / 720g
	Operation Temp.	-20°C ~ +60°C
	Waterproof	IP66

Certificate : CE , FCC , RoHS


\*No SD card slot & local storage function for Argentina

## Design Features



External SD card slot with cover  
(Add rubber for waterproof)

## Dimension

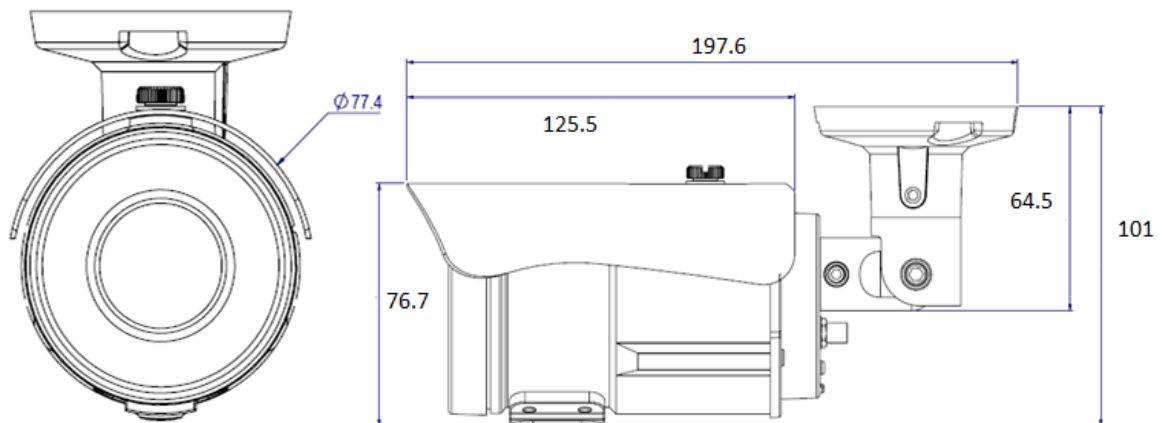

## Accessories



YUK-D06  
Junction Box (option)