

5MP IP BULLET CAMERA

YUC-H7B882



Feature

- H.264 5MP (2592x1944) 20fps IP Camera
- Advanced compression technology reduce 20% bandwidth
- Tampering detection & 3 motion area setup
- Built-in varifocal lens 3-10.5mm
- Support SD card continuous recording up to 64G
- 3 steps IR control
- Analogue output
- 3-Axis bracket included
- Weather proof IP66
- Mobile view support (push video)
- POE support
- ONVIF compliant




3-step IR Intensity



Save Until 20% of HDD Space



Privacy Mask

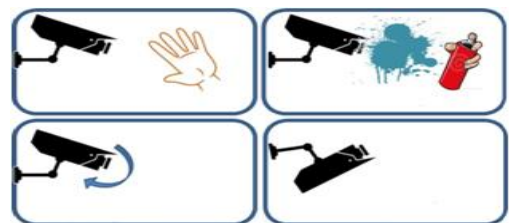

Tampering Detection

Specification

YUC-H7B882

Server	Compression	H.264 / MJPEG
	Resolution	2592x1944 @20FPS / 2048 x 1536 @20FPS / 1920x1080 @30FPS / 1280x720 @30FPS / 640x480 @30FPS / 320 x 240 @30FPS
	Traffic Control	32K ~ 10Mbps
	Max. Frame Rate	(20fps)2592x1944 , (30fps)1920x1080
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
	Number of User	Max. 10 connections
	Storage Capacity	Micro SD card / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection/ I/O / Schedule / Tampering detection
Network Camera	Sensor	1/3.2" Megapixel CMOS sensor
	Optical Lens	Vari-focal 3 ~ 10.5mm/F1.4
	View Angle	26.94~70.25°(H), 20.17~51.16°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor/ 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.5 Lux(Color) / 0.1 Lux(B/W)
	IR LED / Range	28 + 2 pcs High Power / 30M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask / 3DDNR/ IR Intensity
	Audio	Audio
Audio Compression		G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
Adjust Volume		Mic-in / Line-out web adjustable
Audio In		3.5mm phone jack(Support 2-way)
Audio Out		3.5mm phone jack(Support 2-way)
Terminal	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE / WiFi (802.11/b/g/n)
	Video Interface	--
	External Port	DI / DO
	SD Card	Micro SD Card(Up to 64GB)
General	Operation Voltage	DC 12V Max.: 6.5W(IR on) / 3.7W(IR off) PoE Max.: 8.2W(IR on) / 4.3W(IR off)
	Dimen./Weight	77.4mm(φ) x 125.5mm(H) / 720g
	Operation Temp.	-20°C ~ +60°C
	Waterproof	IP66

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Design Features




External zoom / Focus adjustment



External SD card slot with cover
(Add rubber for waterproof)

Dimension

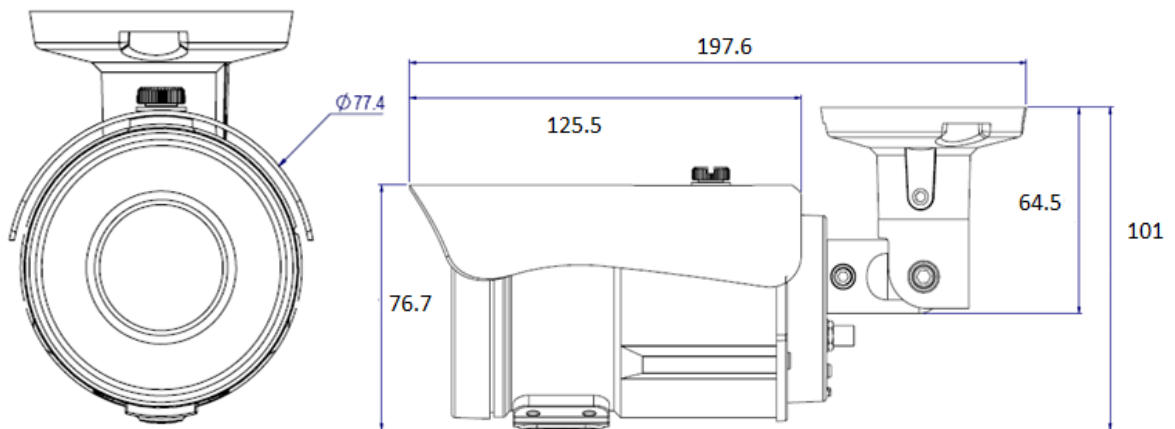

Accessories



YUK-D06
Junction Box (option)