

# 2MP IP BULLET CAMERA

## YUC-H7BE6




### Feature

- H.264 2MP/30fps, Sony Xarina E Solution/Exmor CMOS Sensor
- Excellent night vision performance with low noise (3D-De Noise)
- Built-in varifocal lens 2.8-12mm
- ESD & surge protection design
- Support SD card continuous recording
- 3 areas motion detection & 3 areas privacy mask
- 3 steps IR control
- Day/night profile adjustment
- 3-Axis bracket included
- Cold start heater built-in option and weather proof IP66
- Mobile view support (push video)
- POE support
- ONVIF compliant




3-step IR Intensity

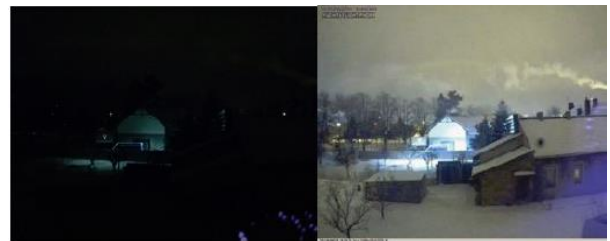

Excellent low light



Distortion Correction

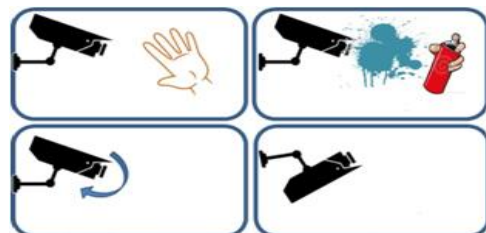

Tampering Detection

# Specification

## YUC-H7BE6

Server	Compression	H.264 / MJPEG
	Resolution	1920x1080@30fps, 1280x1024@30fps, 1280x960@30fps, 1280x720@30fps, 800x600@30fps, 800x480@30fps, 640x480@30fps, 640x360@30fps, 320x240@30fps, 176x144@30fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps)1920x1080
	Safety	User-ID and password
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, ICMP
	Number of User	Max. 10 connections
	Storage Capacity	SD / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection/ Schedule / Tampering Detection
Network Camera	Sensor	1/2.9" Sony Exmor CMOS sensor
	Optical Lens	2.8-12mm @ F1.4
	View Angle	32.30°~96.88°(H), 24.52°~71.25°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.008 Lux (Color), 0.003 Lux (B/W)
	IR LED / Range	30pcs/35M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask / 3D Noise Reduction / IR Intensity / Anti-fog / Distortion correction / Temperature detection
	Audio	Audio
Audio Compression		G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
Adjust Volume		Mic-in / Line-out web adjustable
Audio In		3.5mm phone jack(Support 2-way)
Audio Out		3.5mm phone jack(Support 2-way)
Terminal	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE / WiFi (802.11/b/g/n)
	Video Interface	-
	External Port	DI / DO
	SD Card	Micro SD Card(Recording trigger for schedule, motion detertion, IP check, network wire break down, DI)
General	Operation Voltage	DC 12V Max:5.58W(IR ON) ; 2.30W(IR OFF) PoE Max:6.69W(IR ON) ; 2.76W(IR OFF)
	Dimen./Weight	77.4mm(φ) x 125.5mm(H) / 720g
	Operation Temp.	-20°C ~ +60°C / -40°C ~ +60°C (Cold start heater option)
	Waterproof	IP66

Certificate : CE , FCC , RoHS

\*No SD card slot & local storage function for Argentina

# Design Features




External zoom / Focus adjustment



External SD card slot with cover

# Dimension

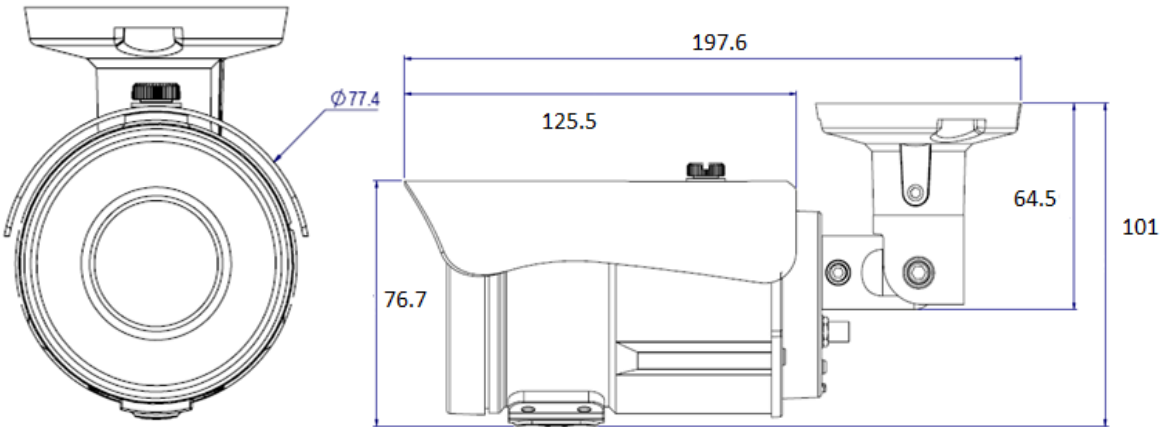

# Accessories



YUK-D06  
Junction Box (option)