

4MP IP BULLET CAMERA

YUC-HQ82



Feature

- H.264 4MP (2688x1520) 30fps real time
- Advanced compression technology reduce 20% bandwidth
- ESD & surge protection design
- Support SD card continuous recording up to 64G
- 3 areas motion detection & 3 areas privacy mask
- 3 steps IR control
- 3-Axis angle adjust
- Vandal proof & weather proof IP66
- Mobile view support (push video)
- POE support
- ONVIF compliant




3-step IR Intensity



Privacy Mask



Save Until 20% of HDD Space

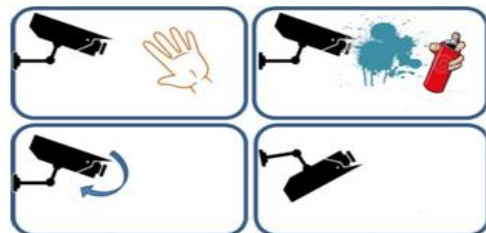

Tampering Detection

Specification


YUC-HQ82

Server	Compression	H.264 / JPEG
	Resolution	2688x1520@30fps, 1920x1080@30fps,1280x720@30fps, 640x360@30fps
	Traffic Control	32K ~ 10Mbps
	Max. Frame Rate	(30fps)2688x1520
	Safety	User-ID and password
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
	Number of User	Max. 10 connections
	Storage Capacity	SD / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection/ Schedule / Tampering Detection
Network Camera	Sensor	1/3" Megapixel CMOS sensor
	Optical Lens	3.6mm @ F2.1
	View Angle	78.54°(H), 45.43°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.15Lux (Color), 0.08 Lux (B/W)
	IR LED / Range	28pcs / 20M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask / Noise Reduction / IR Intensity
Audio	Audio	-
	Audio Compression	-
	Adjust Volume	-
	Audio In	-
	Audio Out	-
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	-
	External Port	-
	SD Card	SD Card(Up to 64GB)
General	Operation Voltage	DC 12V Max: 4.68W(IR on) / 3.12W(IR off) PoE Max: 6.24W(IR on) / 4.32W(IR off)
	Dimen./Weight	68mm(φ) x 102mm(H) / 550g
	Operation Temp.	-20°C ~ +60°C
	Waterproof	IP66
	Vandal Proof	-

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Dimension

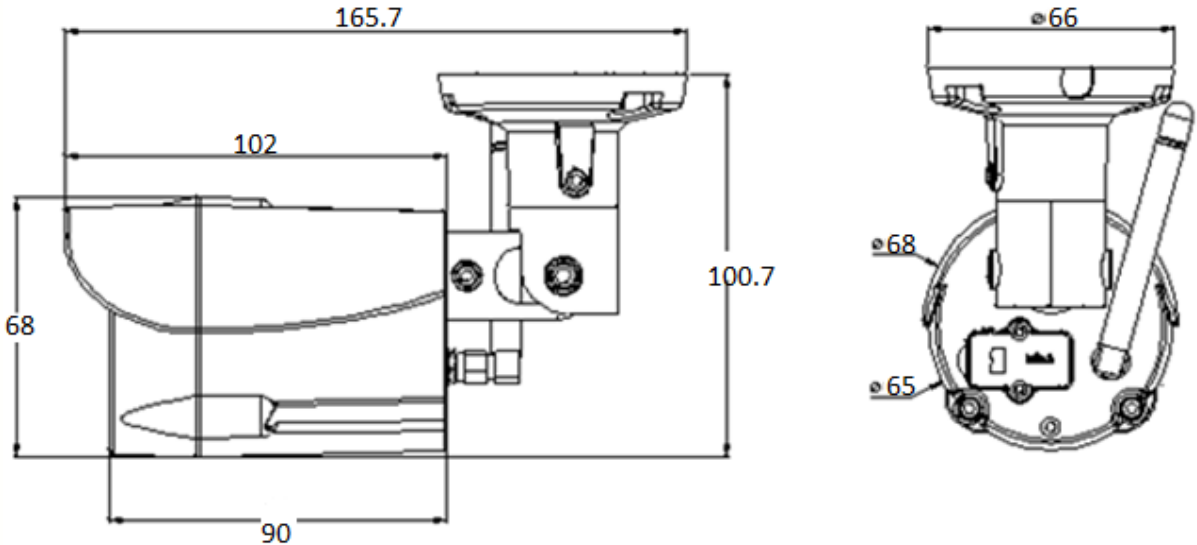

Accessories



YUK-D06
Junction Box (option)