

2 MEGA FULL HD IP CUBE CAMERA



YUC-HS86

Feature

- Full HD 1080P 25 FPS Real Time
- H.264/MPEG-4/M-JPEG triple streams
- Micro SD card backup
- Digital Noise Reduction
- 2-way audio
- Mobile view support
- Digital Wide Dynamic Range / Shutter Speed adjust
- WiFi Support / PoE Support (Option)



| | | |
|----------------|---------------------------------|--|
| Server | Compression | Triple streams : H.264/MPEG-4/JPEG |
| | Pixel (H x V) | 1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144 |
| | Traffic Control | 32/48/64/96/128/192/256/320/384/448/512/576/640/704/768Kbps 1/1.5/2/2.5/3/3.5/4/5/6/7/8Mbps |
| | Max. Frame Rate | (25fps) 1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144 |
| | Safety | User-ID and password |
| | Protocols | Ipv4/v6 / HTTP / HTTPS / QoS Layer 3 level / FTP / SMTP / Bonjour / UPnP / SNMPv1/v2c/v3 DNS / DDNS / NTP / RTSP / RTP / UDP / IEEE 802.1x / DHCP / Access list filtering |
| | Number of User | Max. 10 connections for singal video |
| | Storage Capacity | Micro SD / FTP / NAS (Samba) |
| | Alerting | SMTP / FTP / HTTP / Micro SD |
| | Pre / Post Alarm | Pre (0,1,2,3,4,5)/ Post (0,1,2,3,4,5,10) seconds |
| | Release for alarm | Motion detection/ I/O / schedule |
| Network Camera | Image Pick-up Device | 1/2.7" Progressive scan CMOS sensor 2 Mega pixel |
| | Shutter Time | outdoor / indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000) |
| | Min Illum | 0.5 Lux |
| | Optical Lens | 4.2mm / F1.6 |
| | Day / Night | Light Sensor Mode / Color Mode(Day) / B/W Mode(Night) / Times Mode / Synchronize with DI Input |
| Audio | Audio | 2-way-halfduplex |
| | Audio Compression | G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps) |
| | Adjust Volume | Mic-in / Line-out web adjustable |
| | Audio In | Mic built-in |
| Audio Out | 3.5mm phone jack (Support 2way) | |
| Terminal | Network Interface | Ethernet (10Base-T/100Base-Tx) / PoE / WiFi-802.11(b/g/n) |
| | External Port | DI / DO |
| | SD Card | Micro SD (up tp 32GB) |
| General | Operation Voltage | 12V DC : max. 2.3W PoE(802.3af above) : max. 2.9W |
| | Dimen./Weight | 59(mm) x 93.7(mm)x 45.5(mm) / @ 150g / 12pcs per carton |
| | Operation Temp. | -10°C ~ +45°C |

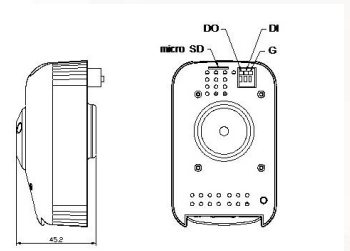

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina