

5MP IP VANDAL DOME CAMERA

YUC-Hi882



Feature

- H.264 5MP (2592x1944) 20fps IP Camera
- Advanced compression technology reduce 20% bandwidth
- Tampering detection & 3 motion area setup
- Built-in varifocal lens 3-10.5mm
- Support SD card continuous recording up to 64G
- 3 steps IR control
- Analogue output
- 3-Axis adjusted design
- Vandal proof & weather proof IP66
- Mobile view support (push video)
- POE support
- ONVIF compliant




3-step IR Intensity



Save Until 20% of HDD Space



Privacy Mask

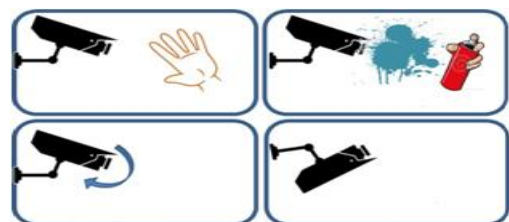

Tampering Detection

Specification



YUC-Hi882

Server	Compression	H.264 / MJPEG
	Resolution	2592x1944 @20FPS / 2048 x 1536 @20FPS / 1920x1080 @30FPS / 1280x720 @30FPS / 640x480 @30FPS / 320 x 240 @30FPS
	Traffic Control	32K ~ 10Mbps
	Max. Frame Rate	(20fps)2592x1944 , (30fps)1920x1080
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
	Number of User	Max. 10 connections
	Storage Capacity	Micro SD card / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection/ I/O / Schedule / Tampering detection
Network Camera	Sensor	1/3.2" Megapixel CMOS sensor
	Optical Lens	Vari-focal 3 ~ 10.5mm / F1.4
	View Angle	26.94°~70.25°(H) , 20.17°~51.16°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor/ 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	0.5 Lux(Color) / 0.1 Lux(B/W)
	IR LED / Range	12 Units 5φ + 2 Units High Power, 850nm / 20M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask / 3DDNR / IR Intensity
	Audio	Audio
Audio Compression		G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
Adjust Volume		Mic-in / Line-out web adjustable
Audio In		Interior line in(Support 2-way)
Audio Out		Interior line out(Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	--
	External Port	DI / DO
	SD Card	Micro SD(Up to 64GB)
General	Operation Voltage	DC 12V Max: 6.24W(IR on) / 3.84W(IR off) PoE Max.: 7.68W(IR on) / 4.8W(IR off)
	Dimen./Weight	137mm(φ) x 102mm(H) / 890 g
	Operation Temp.	-20°C ~ +60°C
	Waterproof	IP66
	Vandal Proof	IK10

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina

Dimension

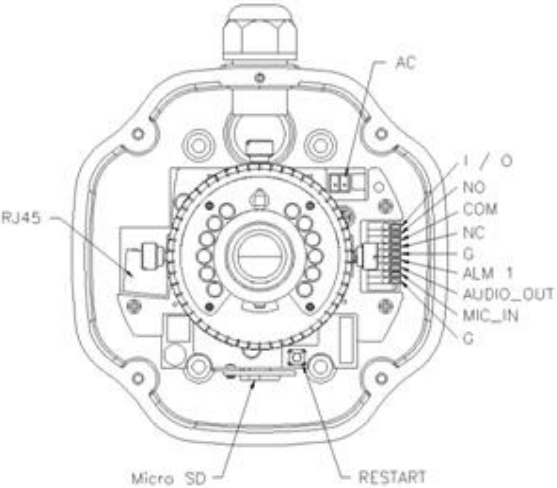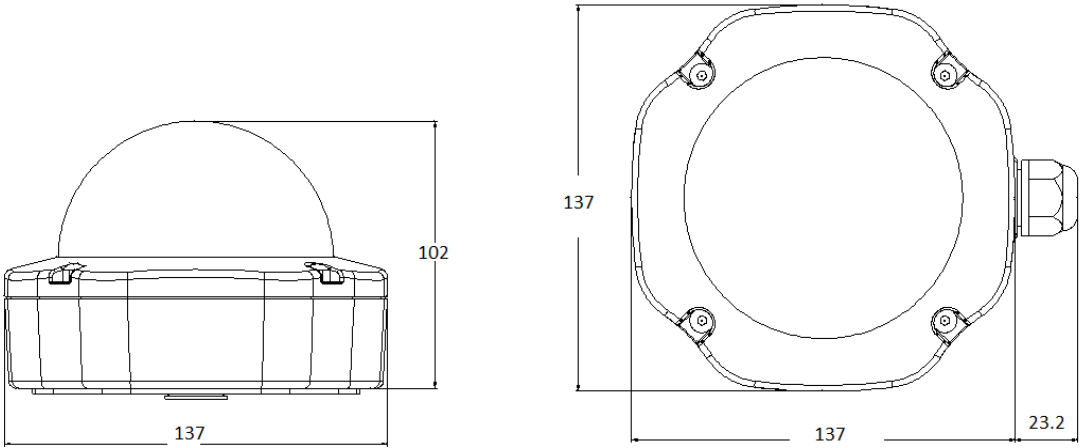

Accessories



YUK-D07
L-Type bracket (option)