


# 4K2K IP VANDAL DOME CAMERA

## YUC-Hi89

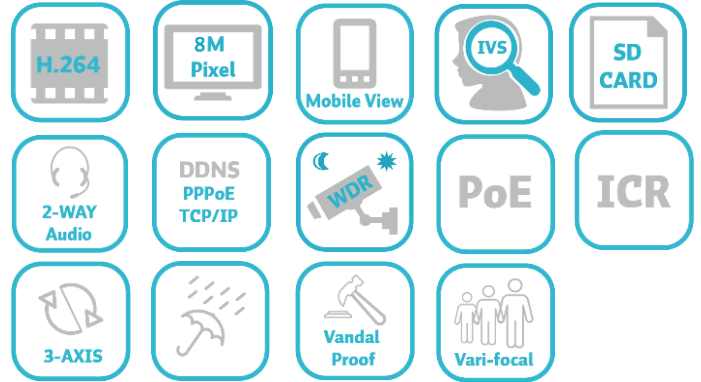

### Feature

- H.264 4K2K (3840 x 2160) 15fps IP Camera for exceptional detail
- Advanced compression technology reduce 20% bandwidth
- Tampering detection & 3 motion area setup
- Built-in varifocal lens 3-10.5mm
- ESD & Surge protection design
- Support SD card continuous recording up to 64G
- 3 steps IR control
- Day/night profile adjustment
- 3-Axis bracket included
- Vandal proof & Weather proof IP66
- Heater built-in option
- Mobile view support (push video)
- POE support
- ONVIF compliant




3-step IR Intensity



Save Until 20% of HDD Space



Privacy Mask

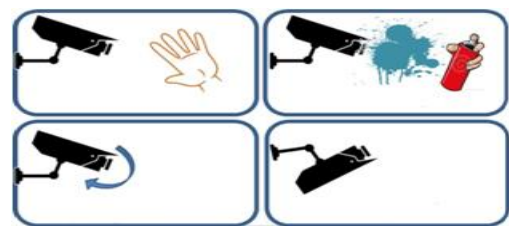

Tampering Detection

# Specification



## YUC-Hi89

Server	Compression	H.264 / MJPEG
	Resolution	3840x2160@15fps,3776x2160@15fps, 2592x1944@15fps, 2048x1536@15fps, 1920x1080@15fps, 1280x720@15fps, 640x480@15fps, 640x360@15fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	3840 x 2160 @15FPS
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list,IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE,DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, ICMP
	Number of User	Max. 10 connections
	Storage Capacity	Micro SD card / FTP / NAS(Samba) / E-mail
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for alarm	Motion detection/ I/O / Schedule / Tampering detection
Network Camera	Sensor	1/2.6" Megapixel CMOS sensor
	Optical Lens	Vari-focal 3 ~ 10.5mm/F1.4
	View Angle	31.83~87.22°(H), 17.72~47.10°(V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 96X
	Shutter Time	Outdoor / Indoor/ 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Min Illum	1 Lux(Color) / 0.5 Lux(B/W)
	IR LED / Range	14PCS/ 20M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Intelligent Video	D-WDR / Tampering Detection / Motion Detection / Privacy Mask /3DDNR/ IR Intensity
	Audio	Audio
Audio Compression		G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
Adjust Volume		Mic-in / Line-out web adjustable
Audio In		External / audio in(Support 2-way)
Audio Out		External / line out(Support 2-way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE
	Video Interface	--
	External Port	DI / DO
	SD Card	Micro SD Card(Recording trigger for schedule, motion detection, IP check, Network wire break down, DI)
General	Operation Voltage	DC 12V Max: 6.00W(IR on) / 3.60W(IR off) PoE Max.: 7.20W(IR on) / 4.80W(IR off)
	Dimen./Weight	137mm(ø) x 102mm(H) / 890 g
	Operation Temp.	-20°C ~ +60°C /-30°C~+60°C (heater option)
	Waterproof	IP66
	Vandal Proof	IK10

Certificate : CE , FCC , RoHS

\*No SD card slot & local storage function for Argentina

## Dimension

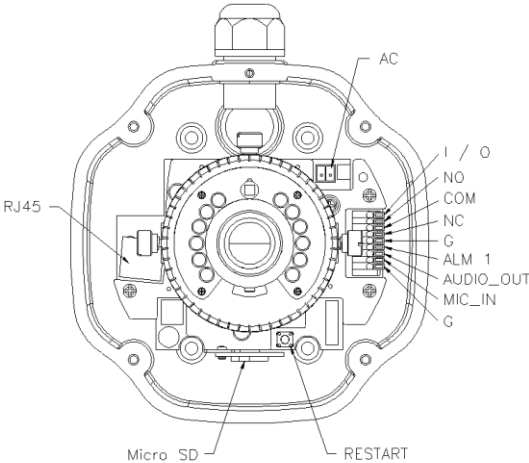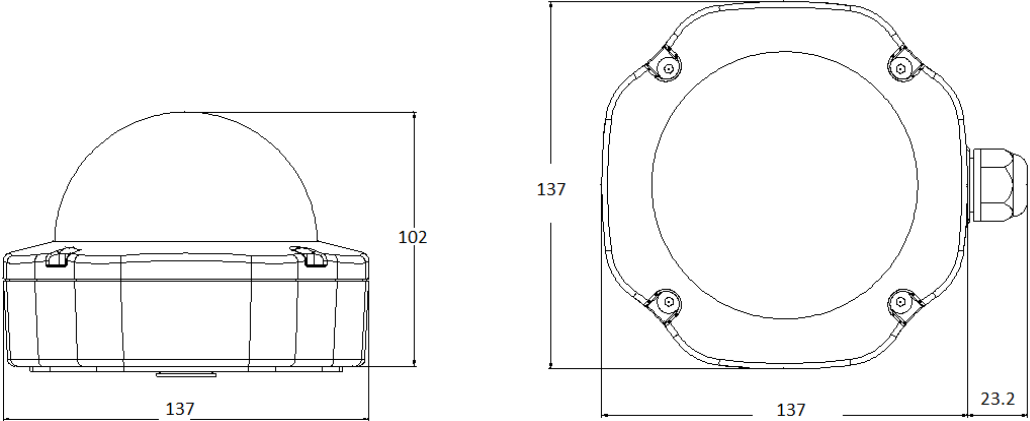

HLV-1H001

## Accessories



YUK-D07  
L-Type bracket (option)